

Intermediate



MIX MONOTONES *Quilt*

WHAT YOU'LL NEED

- Fabrics are from 'Mix Monotones' range
- 40cm Fabric A – Paisley, black/white
- 40cm Fabric B – Paisley, white/black
- 40cm Fabric C – Twinkle, black
- 70cm Fabric D – Twinkle, white (includes binding)
- 40cm Fabric E – Ditzzy Floral, black
- 40cm Fabric F – Ditzzy Floral, white
- 40cm Fabric G – Dahlia, black/white
- 40cm Fabric H – Dots, white/black
- 40cm Fabric I – Dots, black/white
- 40cm Fabric J – Grid, black/white
- 70cm Prima homespun, white

- 20cm Prima homespun, black
- 1.4m x 250cm wide Prima homespun backing fabric, black
- 1.4m Sew Easy cotton/bamboo batting
- Matching Gutermann 100% cotton thread
- Rotary cutter, mat & quilters rulers
- Quilting pins, tape measure
- Scissors, seam ripper
- Hand needle
- Sewing machine with ¼" foot & walking foot

All fabrics should be 100% cotton, washed & pressed.

¼" seam allowance used throughout unless otherwise indicated.

Read all instructions carefully before commencing the project.

CUTTING

All strips are cut across the width of fabric unless otherwise stated.

From each of Fabrics **A, B, C, D, E, F, G, H, I & J** cut –

- 1 x 6½" strip (10 strips in total); crosscut each strip into 2 x 6½" squares and two 3½" x 6½" rectangles (total of 20 squares and 20 rectangles, 2 in each fabric).
- 1 x 4½" strip (10 strips in total); crosscut each strip into 2 x 4½" squares and two 5½" x 4½" rectangles (total of 20 squares and 20 rectangles, 2 in each fabric).

From **white homespun** cut –

- 4 x 1½" strips, crosscut into 15 x 9½" strips for block sashing.
- 5 x 1½" strips, sew together end to end into one long strip pressing seams open, crosscut into 4 x 44" strips for row sashing.
- 5 x 2" strips, sew together end to end into one long strip pressing seams open, crosscut into 2 x 50" strips and 2 x 47" strips for borders.

From **Fabric D** cut –

- 5 x 2½" strips for binding.


From **black homespun** cut –

- 5 x 1¼" strips, sew together end to end into one long strip pressing seams open, crosscut into 2 x 53" strips and 2 x 47" strips for faux piping.

BLOCKS

1. Stack black background fabrics **A, C, E, I & J** into 6½" squares, 3½" rectangles, 4½" squares and 5½" rectangles. Make 4 more stacks with white background fabrics **B, D, F, G & H** (6½" squares, 3½" rectangles, 4½" squares and 5½" rectangles).
2. Sew a 6½" black square to a 3½" white rectangle. Repeat sewing all black 6½" squares to 3½" white rectangles to make 10 x 6½" black/white units. Press seams towards black fabric.
3. Repeat step 2 to sew all white 6½" squares to 3½" black rectangles to make 10 x 6½" white/black units. Press seams towards black fabric.
4. Sew a 4½" black square to a 5½" white rectangle. Repeat sewing together all black 4½" squares and 3½" white rectangles to make 10 x 4½" black/white units. Press seams towards black fabric.
5. Repeat step 4 to sew all white 4½" squares to 5½" black rectangles to make 10 x 4½" white/black units. Press seams towards black fabric.
6. Sew a 6½" black/white unit to a 4½" white/black unit to make Block 1. Repeat to make a total of 5 black/white Block 1.
7. Sew a 6½" white/black unit to a 4½" black/white unit to make Block 1. Repeat to make a total of 5 white/black Block 1.
8. Sew a 4½" black/white unit to a 6½" white/black unit to make Block 2. Repeat to make a total of 5 black/white Block 2.
9. Sew a 4½" white/black unit to a 6½" black/white unit to make Block 2. Repeat to make a total of 5 white/black Block 2.

Block 1

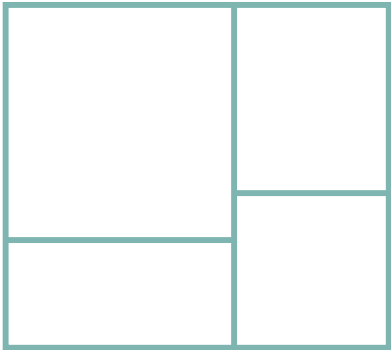

Block 2



QUILT TOP

10. Arrange the blocks in 5 rows of 4 blocks as desired or refer to photo for placement. To join the blocks into rows, sew a 1½" x 9½" sashing strip to the right-hand side of the first 3 blocks in each row and sew blocks together. Press seams towards sashing.
11. Sew one 1½" x 44" row sashing strip to the bottom edge of the first 4 rows. Trim off any excess fabric and press seams towards sashing. Sew the top of rows 2-5 to the sashing on the row above. Press seams towards sashing.
12. Sew a 2" x 50" border strip to each side of the quilt top. Press seams towards border and trim off any excess fabric.
13. Sew a 2" x 47" border strip to the top and bottom edges of the quilt top. Press seams towards borders and trim off any excess fabric.
14. Layer the backing, batting and quilt top and baste together. Quilt as desired.
15. For the faux piping, press strips in half lengthways with right sides together. With raw edges of faux piping strip aligned with raw edge of border sew a 53" strip to each side border. Press flat onto border and trim off any excess fabric. Repeat sewing a 47" strip to top and bottom borders. Press strip flat onto border and trim off any excess fabric.
16. Join the 5 x 2½" binding strips on the bias to make one long strip. Press in half lengthwise and bind mitering corners. Attach a label or sign and date your quilt.