




Thank you for using this pattern. We want you to sew along with us! Tag us on Instagram (@abrightcorner, @gigisthimble, and @jedicraftgirl). We'd love for you to use the hashtags #fivefatquarterfun and #preppyquilt when posting about this quilt.




Copyright 2017 Andy Knowlton Pattern for individual use only. Please do not reproduce in any way without consent from Andy Knowlton. ALL RIGHTS RESERVED.

Preppy 50" x 60" designed by Andy Knowlton (abrightcorner.com)

- Please read through all instructions before beginning
- Seam allowances are 1/4" unless otherwise stated
- WOF = width of fabric
- RST = right sides together

Fabric Requirements

5 Fat Quarters 1 yard navy swiss dot (sashing) 1-1/2 yard solid white (background) Binding: 1/2 yard Backing: 3-1/3 yards

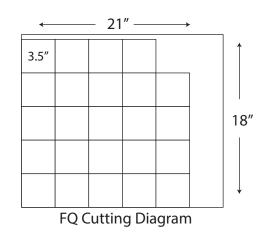

Cutting Instructions

Follow the fat quarter cutting diagram to cut 24 (3.5") squares from each FQ. Need 120 total. Background / White:

Cut 8 @ 3.5" x WOF. Subcut to 80 @ 3.5" x 3.5" (11 from each strip)

Cut setting and corner triangles:

Cut 2 @ 11-1/4" x WOF

From 1 strip cut 3 @ 11-1/4"

From 1 strip cut 2 @ 11-1/4" and 2 @ 5-5/8"

Cut each of the 11-1/4" squares diagonally in half twice (setting triangles need 18) Cut each of the 5-5/8" squares diagonally in half once (corner triangles - need 4)

Sashing / navy swiss dot:

Cut 4 @ 3.5" x WOF. Subcut 100 @ 1.5" x 3.5" (26 from each strip)


Cut 2 @ 7.5" x WOF. Subcut 50 @ 1.5" x 7.5" (26 from each strip)

Binding:

Cut 6 strips @ 2.5" x WOF. Set aside to use for binding.

Block Construction


1. Sew two white 3.5" squares together, with a 1.5" x 3.5" sashing strip between. Press seams toward sashing strip. Then sew two of these units together with a 1.5" x 7.5" sashing strip between. Press seams toward sashing. Block will measure 7.5" square. Repeat to make 20, all-white blocks.

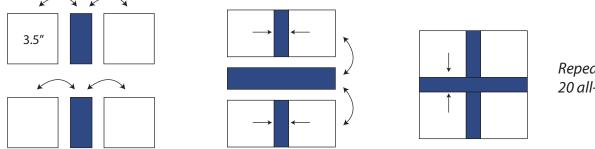

Repeat to make 20 all-white blocks

7.5" square

2. Sew two print (3.5") squares together, with a $1.5" \times 3.5"$ sashing strip between. Press seams toward squares. Then sew two of these units together with a $1.5" \times 7.5"$ sashing strip between. Press seams toward squares. Block will measure 7.5" square. Repeat to make 30 print blocks.

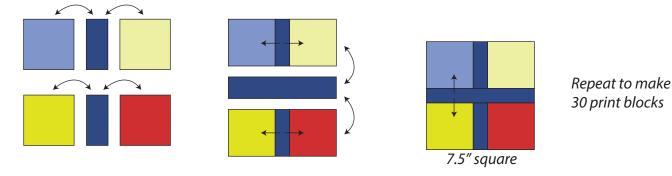

3. Following the quilt top diagram, lay out quilt blocks into diagonal rows, placing the setting triangles on the sides, top and bottom, and the corner triangles on the four corners. Sew quilt together into rows, pressing the seams of even numbered rows to the right and odd numbered rows to the left. Next, sew rows together, matching seams. Pin at each seam intersection if necessary.

Your quilt top is complete! Baste, quilt and bind as desired.

